
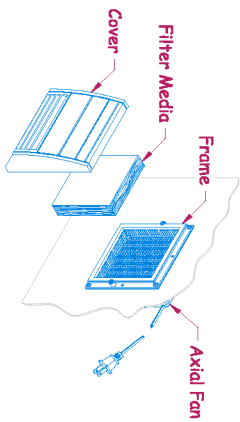
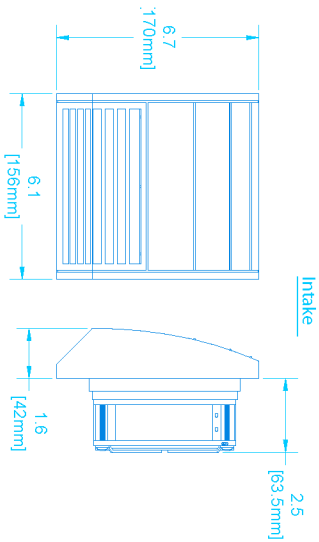


- 10: Filter Media (10 Micron)
- 3: Filter Media (3 Micron)

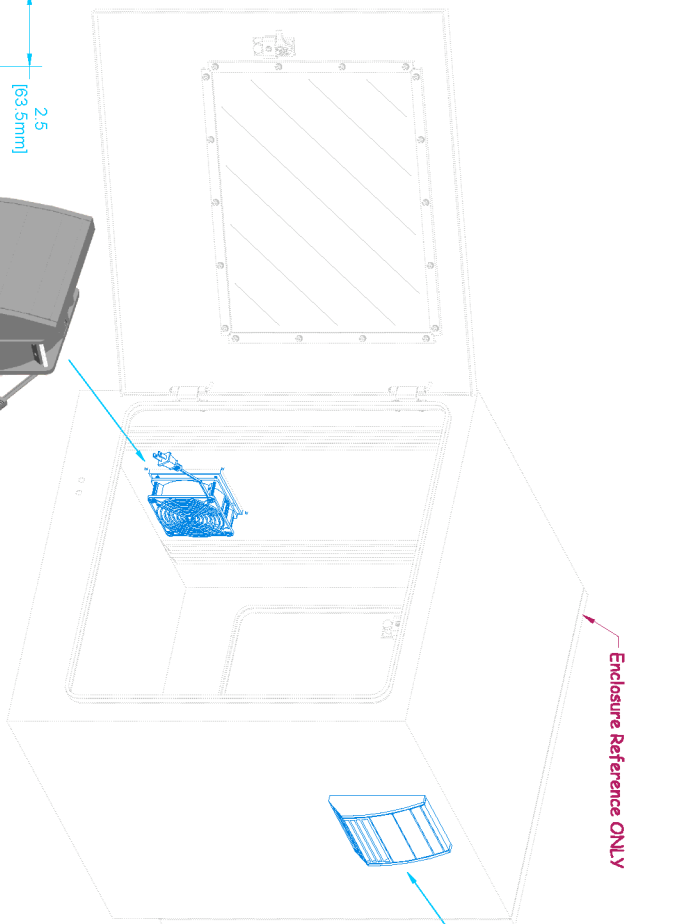

NOTE: Intake & Exhaust locations vary based on enclosure model

Filtered Fan Continuous Operation

Designed to Maintain IP53 Protection

Axial Fan:

105 CFM Free Air

120 VAC, .20 AMPS



Cover & Frame:

Plastic (Black), UL94-V0

Filter Media:

Polyester mat 3 or 10 micron

* Add -230 to the end of the part number for a 230 VAC, 50/60 Hz, .12 AMP axial fan.

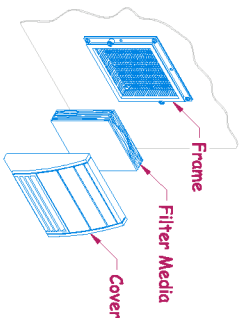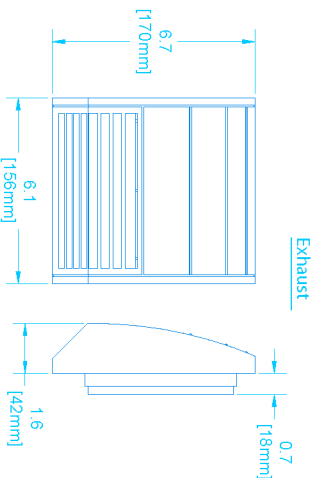

Panel Cutout

