


FIVE Ø3.50 HOLES IN TOP PANEL  
FOR POWER OR DATA CABLES  
(HOLES PLUGGED WITH REMOVABLE  
PLASTIC CAP)

REMOVABLE  
VENTED TOP PANEL

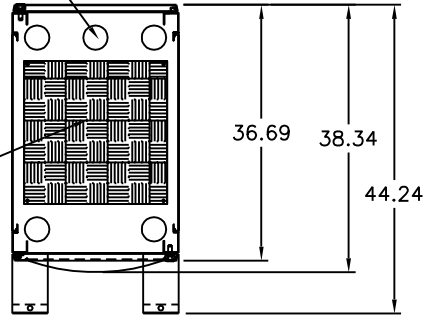

TOP

REMOVABLE LOCKING  
SIDE PANELS

SLIDING  
BOTTOM PANEL  
CABLE ACCESS


FRONT & REAR  
DOOR REVERSIBLE  
SWING DIRECTION

SECTION

2 SETS OF E.I.A. RAILS  
ADJUSTABLE FRONT & REAR  
SQ. PUNCH E.I.A. RAILS  
UTILIZE #10 OR 6mm CLIP NUTS


HIGH VENT PERFORATED  
PROTRUDING PROFILE  
LOCKING FRONT DOOR

42u (73.5")  
Mtg Height  
19" Standard

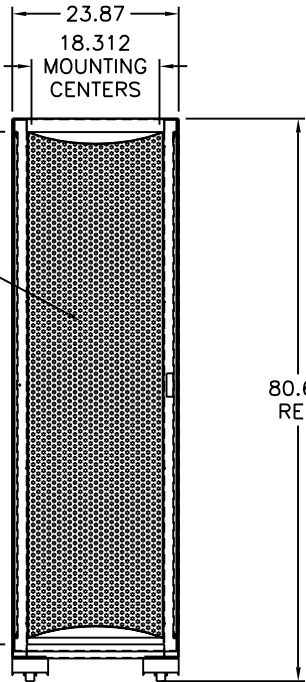


FRONT

1.75 30.94 MAX  
RAIL TO RAIL

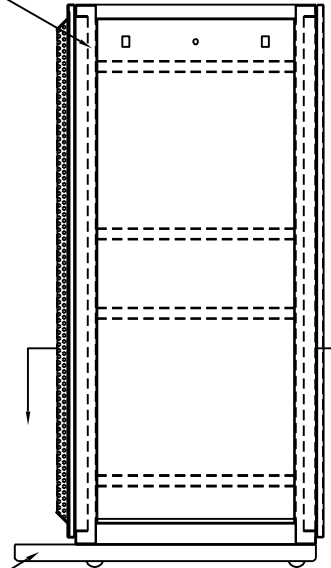

RIGHT SIDE

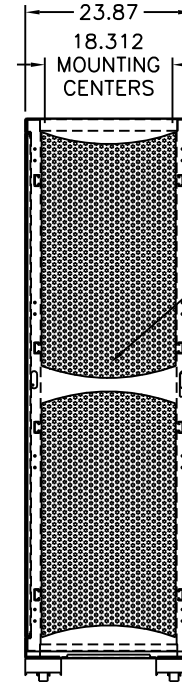

REAR

HIGH VENT PERFORATED  
LOCKING, FLUSH  
REAR DOOR

ANTI-TIP RUNNERS  
WITH LEVELERS

STANDARD PRODUCT DATA SHEET  
Dimensions are in inches. Specifications are subject to change without notice.